



DESCRIPTION

Replace existing metal halide flood fixtures with these more efficient color selectable LED flood fixtures.

FEATURES

- Delivers up to 151 LPW for highly efficient performance
- Knuckle mount adjusts up to 180° (90° left and 90° right)
- Yoke mount adjusts up to 180° (90° left and 90° right)
- Slipfitter adjusts up to 180° (90° left and 90° right)
- Trunnion adjusts up to 180° (90° left and 90° right)
- 0-10V dimming; see Dimmer Compatibility for list of compatible dimmers
- Light output changes depending on the color temperature selected; see Selectable Table for full breakdown
- Color temperature can be adjusted using the dip switch on the top of the fixture; see installation instructions for more information

LISTINGS

- UL rated for wet locations
- IP65
- FCC

PERFORMANCE

- CRI: >80
- CCT: 3000K, 4000K, 5000K
- LED L70 Lifetime: 100,000 Hours

THERMAL

- -31°F to 122°F or (-35°C to 50°C) operating temperature

ELECTRICAL

- THD: ≤20%
- Power Factor: ≥0.9
- Input Voltage: 120-277V
- Surge Protection: 2.5kV (15W-60W), 4Kv (80W-140W)
- Dimmable power supply (0-10V)

INSTALLATION

- Designed for installation with included mount; see Performance Summary for a full breakdown of which mount is included. For information on how to install these fixtures, see installation instructions.

CONSTRUCTION

- Die-cast aluminum housing
- Durable polyester bronze powder coating withstands demanding environments
- Clear impact-resistant tempered glass lens

project name	type
catalog number	
comments	voltage
approved by	date



WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

APPLICATIONS

- Safety and Security Lighting
- Sign Lighting
- Building Facades

PERFORMANCE SUMMARY

Item #	Watts*	CCT*	Beam Angle	CRI	Dimming	Voltage	Replaces	Mounting	BUG
PLTS-12339	15W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	70W MH	Knuckle	B1-U0-G0
PLTS-12340	15W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	70W MH	Yoke	B1-U0-G0
PLTS-12341	25W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	100W MH	Knuckle	B1-U0-G0
PLTS-12342	25W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	100W MH	Yoke	B1-U0-G0
PLTS-12343	35W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	175W MH	Knuckle	B2-U0-G0
PLTS-12344	35W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	175W MH	Yoke Mount	B2-U0-G0
PLTS-12345	60W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	175W MH	Knuckle	B3-U0-G1
PLTS-12346	60W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	175W MH	Yoke	B3-U0-G1
PLTS-12347	80W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	250W MH	Slipfitter	B3-U0-G1
PLTS-12348	80W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	250W MH	Yoke	B3-U0-G1
PLTS-12349	105W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	250W MH	Slipfitter	B4-U0-G1
PLTS-12350	105W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	250W MH	Yoke	B4-U0-G1
PLTS-12351	140W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	400W MH	Slipfitter	B4-U0-G1
PLTS-12352	140W	3000K / 4000K / 5000K	145°	>80	0-10V	120-277V	400W MH	Trunnion	B4-U0-G1

*See Selectable Table for full breakdown

SELECTABLE TABLE

Wattage	CCT	Lumen	Efficacy
15	3000K	2097	140
	4000K	2259	151
	5000K	2194	146
25	3000K	3485	139
	4000K	3760	150
	5000K	3658	146
35	3000K	4642	133
	4000K	5034	144
	5000K	4864	139
60	3000K	7782	130
	4000K	8372	140
	5000K	8178	136
80	3000K	10,712	134
	4000K	11,509	144
	5000K	11,325	142
105	3000K	13,243	126
	4000K	14,129	135
	5000K	13,616	130
140	3000K	17,894	128
	4000K	19,158	137
	5000K	18,672	133

DIMMER COMPATIBILITY

Brand	Model
Leviton	SD710
Leviton	IP710
Legrand	RH4FBL3PW
Lutron	NFTV
Lutron	NTSTV
Lutron	DVTV

15W-35W W/ KNUCKLE MOUNT

Length: 5.79"
 Length (with mount): 9.21"
 Width: 7.40"
 Depth: 2.67"
 Weight: 2.34 lbs
 Weight (with mount): 2.65 lbs

Knuckle Mount Length: 3.47"
 Knuckle Mount Width: 2.64"
 Knuckle Mount Height: 1.89"



60W W/ YOKE MOUNT

Length: 7.44"
 Length (with mount): 9.13"
 Width: 9.7"
 Depth: 3.03"
 Weight: 4.10 lbs
 Weight w/ mount: 4.81 lbs


Yoke Length: 10.31"
 Yoke Width: 6.02"
 Yoke Height: 1.18"



15W-35W W/ YOKE MOUNT

Length: 5.79"
 Length (with mount): 7.24"
 Width: 7.95"
 Depth: 2.60"
 Weight: 2.34 lbs
 Weight (w/ mount): 2.87 lbs

Yoke Length: 7.95"
 Yoke Width: 4.92"
 Yoke Height: 1.10"

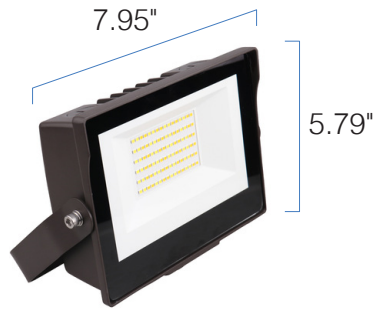

80W W/ SLIPFITTER MOUNT

Length: 7.44"
 Length (with mount): 16.06"
 Width: 10.24"
 Depth: 3.58"
 Weight: 4.10 lbs
 Weight (w/ mount): 6.88 lbs

Slipfitter Length: 12.91"
 Slipfitter Width: 10.24"
 Slipfitter Height: 2.87"



60W W/ KNUCKLE MOUNT

Length: 7.44"
 Length (with mount): 10.91"
 Width: 9.69"
 Depth: 3.03"
 Weight: 4.10 lbs
 Weight (with mount): 4.41 lbs

Knuckle Mount Length: 3.47"
 Knuckle Mount Width: 2.64"
 Knuckle Mount Height: 1.89"



80W W/ YOKE MOUNT

Length: 7.44"
 Length (with mount): 9.13"
 Width: 9.7"
 Depth: 3.03"
 Weight: 4.41 lbs
 Weight w/ mount: 5.11 lbs

Yoke Length: 10.31"
 Yoke Width: 6.02"
 Yoke Height: 1.18"



105W W/ SLIPFITTER MOUNT

Length: 9.09"
 Length (with mount): 15.94"
 Width: 11.42"
 Depth: 3.54"
 Weight: 7.2 lbs
 Weight (w/ mount): 8.82 lbs



Slipfitter Length: 6.93"
 Slipfitter Width: 4.88"
 Slipfitter Height: 2.87"

140W W/ SLIPFITTER MOUNT


Length: 9.09"
 Length (with mount): 18"
 Width: 11.8"
 Depth: 4.06"
 Weight: 7.72 lbs
 Weight (w/ mount): 9.08 lbs



Slipfitter Length: 6.89"
 Slipfitter Width: 4.88"
 Slipfitter Height: 2.87"

105W W/ YOKE MOUNT

Length: 9.09"
 Length (with mount): 10.98"
 Width: 12.05"
 Depth: 3.9"
 Weight: 7.72 lbs
 Weight (w/ mount): 8.51 lbs

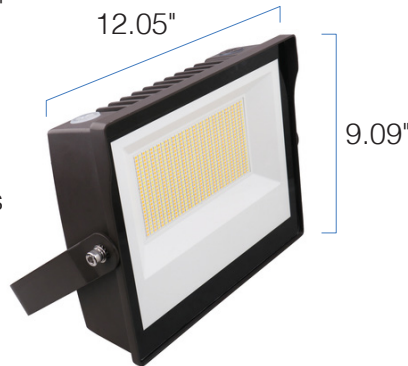

Yoke Length: 12.05"
 Yoke Width: 7.13"
 Yoke Height: 1.38"


140W W/ TRUNNION MOUNT

Length: 9.09"
 Length (with mount): 15.4"
 Width: 11.8"
 Depth: 3.9"
 Weight: 7.72 lbs
 Weight (w/ mount): 9.08 lbs




Trunnion Length: 7.13"
 Trunnion Width: 5.35"
 Trunnion Depth: 2.76"


15W FLOOD FIXTURE

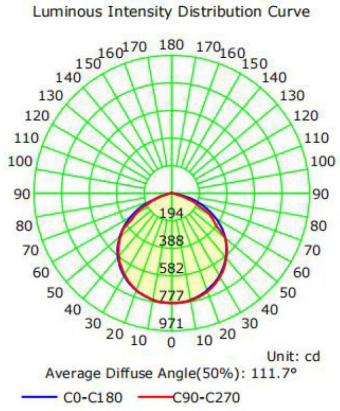


80W FLOOD FIXTURE

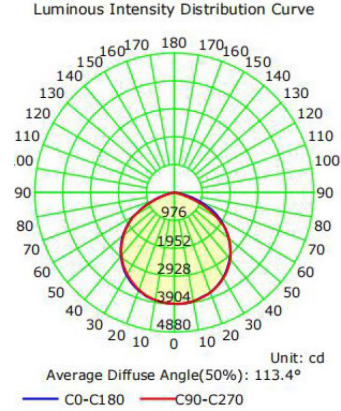


25W FLOOD FIXTURE

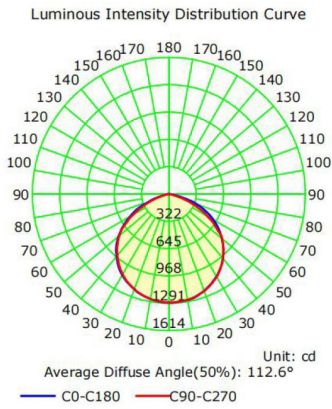


105W FLOOD FIXTURE

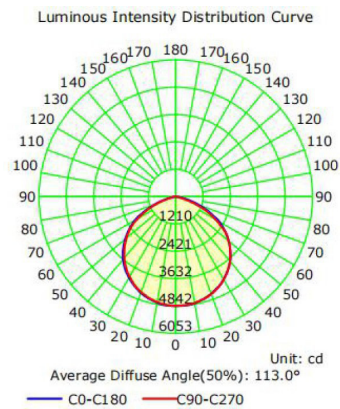


35W FLOOD FIXTURE

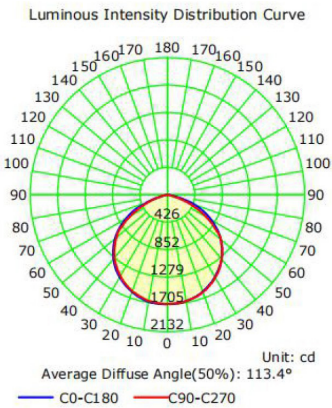

140W FLOOD FIXTURE

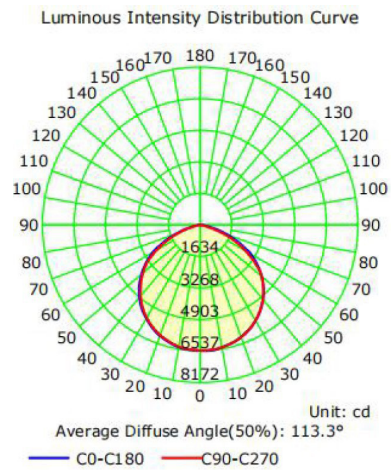

60W FLOOD FIXTURE

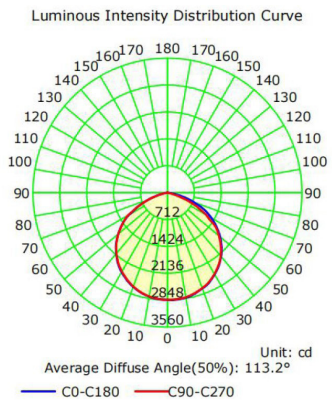

Project Name

Location

Prepared By



Notes

[www] 11-22-2021 02:57:39

General

Status	Active
Fixture Type	Vapor Proof
Finish	Gray
Wattage	20W
Lumen Output	2050L
CCT (Kelvin)	3000
Temperature	Warm White
IP Rating	IP65
Indoor or Outdoor Fixture	Outdoor

Specifications

Technology	LED
CRI	80+
Voltage	100V-277V
Rated Hours	50000
Operating Temperature	-40C (-40F) to a maximum of +45C (+113F)
Dimmable	Non-Dimmable
Weight (lb.)	2.52
Material	Polycarbonate (PC)

Dimensions

Height (in.)	12.40
Width (in.)	5.68

Compliance

Safety Listing	cULus
Location Rating	Wet
UL Application	Outdoor
Energy Star	No
ADA Compliant	No
California Status	California T24 Compliant
California Prop 65	Lead
RoHS Compliant	Yes
FCC Compliant	Yes

Additional Information

Installation Notes	Adjusts 90 degrees in multiple increments. If wall mounted, Extends ranges from 10.20 in. to 12.40 in.
Warranty	5 Year Limited - Fixtures