

VIP Code: 1BTBDPUE14

866-344-3875

Live Chat

Login

My Lists

My Cart



A LIGHTING NEW YORK STORE

Search

Search

Customer Care Professional Discounts

Shop by Room	Shop by Style	Shop by Category	Shop by Collection	Best Sellers	Sales & Clearance	Open Box
--------------	---------------	------------------	--------------------	--------------	-------------------	----------


Questions about delivery times? Call a Lighting Expert now at 866.344.3875

Home » Cylinder » Outdoor Wall Lights » Progress P5641-30

### Progress P5641-30

Cylinder 1 Light 12 inch White Outdoor Wall Cylinder in Standard

Call 844.344.3536 For Trade Pricing

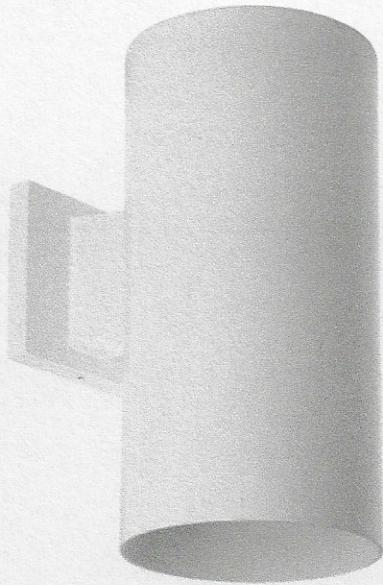

See if you qualify for FREE 2-Day Shipping!

Zip Code

Check

#### Found It Cheaper Somewhere Else?

Call or Live Chat our Lighting Experts for the best price! 866-344-3875

**\$132.00** PER EACH

72 IN STOCK

Starting at \$12/mo with **affirm**. Prequalify now

FREE Shipping & Returns

Original List Price: ~~\$220.00~~ (You Save 40.00%)

NO Restocking Fee

Finish  
White



110% Price Match Guarantee

Features  
Standard Lamping



1

Add To Shopping Cart

Add to List

Price Alert

Make an Offer

[Return Policy](#)

[Shipping Policy](#)

[110% Price Match](#)

Zoom Image

Spec Sheet

#### Related Product



Progress P5641-20  
Cylinder 1 Light 12 inch  
Antique Bronze...  
**\$132.00**



Progress P5641-20/30K  
Cylinder LED 12 inch  
Antique Bronze Outd...  
**\$143.00**



Progress P5641-30/30K  
Cylinder LED 12 inch  
White Outdoor Wall...  
**\$143.00**

[Product Information](#) [General Information](#) [Manufacturer's Catalog\(s\)](#) [Questions](#)

#### General Information

**Progress P5641-30**  
Cylinder 1 Light 12 inch White Outdoor Wall Cylinder in Standard

6" downlight  
Cylinders c  
details feat  
and sophis

Have a question about this product? Ask us!


Live Chat

Submit a Question

Every Order Includes

es!

in 1-2

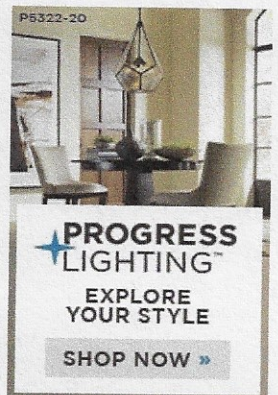

One-Light Outdoor

Ceiling mounted • Damp location listed **PROGRESS LED**

Photometrics:

**P5774-30/30K**

<b>ELECTRICAL DATA</b>	<b>P5774-30/30K</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	16.3
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*

\*See Dimming Notes for more information

**P5774-30/30K**

LED Light Engine: 3000 K 90 CRI

System Wattage: 16.3

Fixture delivered lumens: 757

Fixture Efficacy: 46.4


Spacing Criteria: 1

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	431	
5	428	41
15	412	115
25	329	151
35	233	146
45	158	122
55	94	85
65	57	56
75	29	31
85	9	10
90	0	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	306	40.5
0-40	452	59.7
0-60	659	87.1
0-90	757	100.0
90-180	0	0.0
0-180	757	100.0

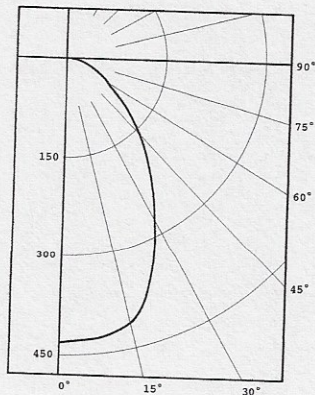

Project: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Contact: \_\_\_\_\_

One-Light Outdoor

Ceiling mounted • Damp location listed **PROGRESS LED**

**Description:**

5" flush mount cylinder. The P5774 Series are ideal for a wide variety of interior and exterior applications including residential and commercial. The Cylinders feature a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits.

**P5774-30/30K**

**Images:**



**Specifications:**

- White (-30) (powder coat paint)
- Die cast and extruded aluminum Construction
- Ideal for a wide variety of interior and exterior applications.
- Die-cast aluminum construction with durable powder coated finish
- 757 lumens 46 lumens/watt
- 3000K color temperature, 90+ CRI
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Meets California Title 24 high efficacy requirements for outdoor use only

**Performance:**

Number of Modules	1
Input Power	16.3w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	757/46.4 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed Meets California Title 24 high efficacy requirements for outdoor use only

**Dimensions:**

Diameter: 5"  
 Height: 6-1/2"